




SELECT Print & Piece Fuse Lite Needle Turn Appliqué TUTORIAL



1. After the piece has cooled, peel away from the Teflon or parchment sheet and cut away the excess web around the label.



2. Trim away the excess stabilizer by cutting directly on the lines. Fuse the stabilizer/image onto the wrong side of the fabric being used for the appliqué. Trim the fabric to within a generous 1/4" of the stabilizer/image.

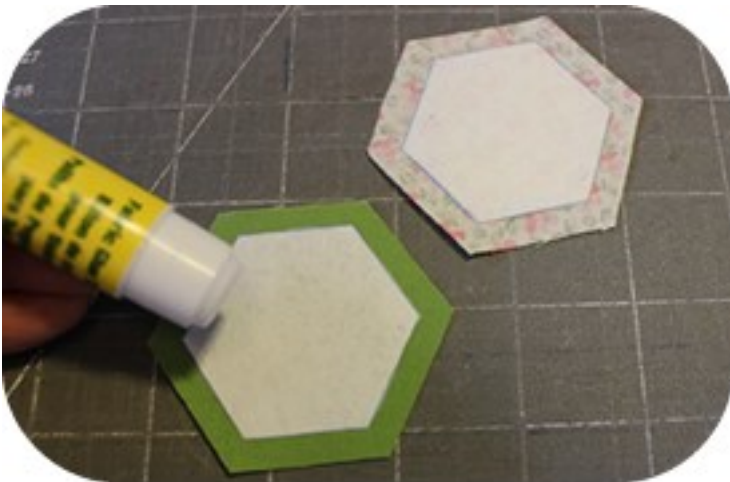

3. Use a fabric-safe glue stick and lightly coat the edge of the stabilizer/image.




4. Turn the fabric so that it sticks to the glue.



5. The appliqué is now ready to be stitched into place on your quilt block, garment or home dec project. There is no need to remove the stabilizer from behind the appliqué: when washed, half of the fibers will dissipate; the other fibers will create a slight loft under the appliqué.

Tips:

Don't forget to use Quilters Select TearAway on the back of your design while stitching appliqué pieces onto fabric and gently tear away once stitching is complete.

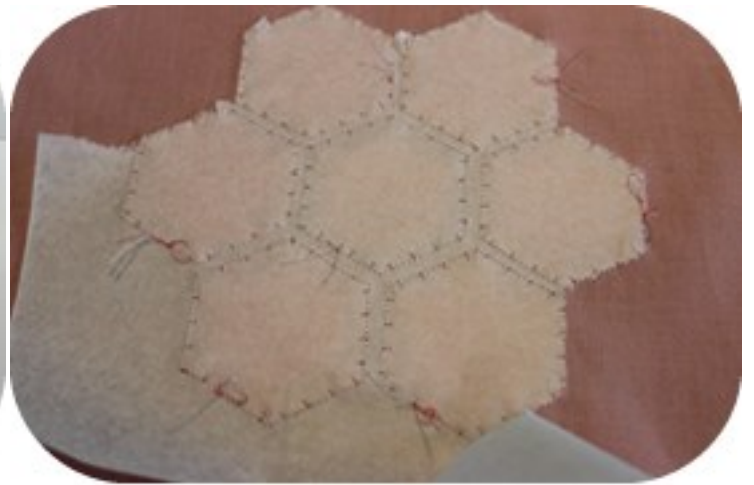

Place a small piece of Quilters Select Appli-Web under each appliqué piece and fuse into place for a nice hold while stitching.

