

DESIGN N STITCH


with Quilters Select

Sew Simply Modern Stitch Along with Quilters Select


Quilt Top Assembly

Pro-Tips:

- Read through all instructions before beginning.
- Seam Allowance= 1/4"
- To make the final assembly as seamless as possible, give each unit a good press. Trim any loose threads from the back of the units.
- Layout the units following the piecing diagram to ensure each block is in the correct orientation.

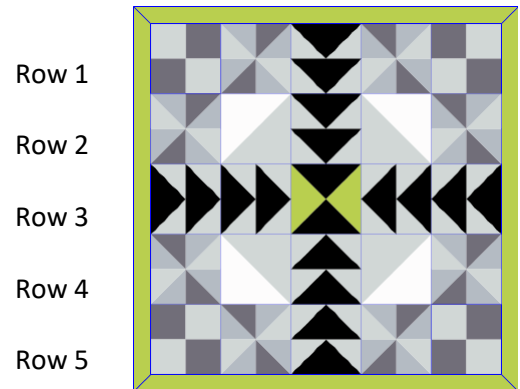


Row 1:




4-Patch
Lighter square in
the upper left
corner

+




Pinwheel
Arrows show
orientation of the
dark HST

+




Flying Geese
Point down

+




Pinwheel
Arrows show
orientation of the
dark HST

+





4-Patch
Lighter square in
the upper right
corner

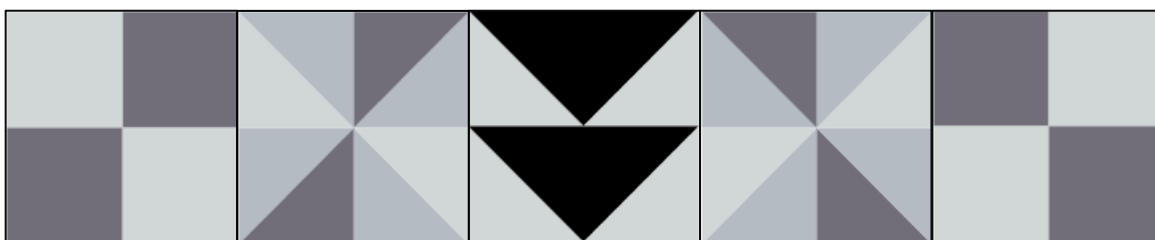



DESIGN N STITCH

with Quilters Select

Row 2:

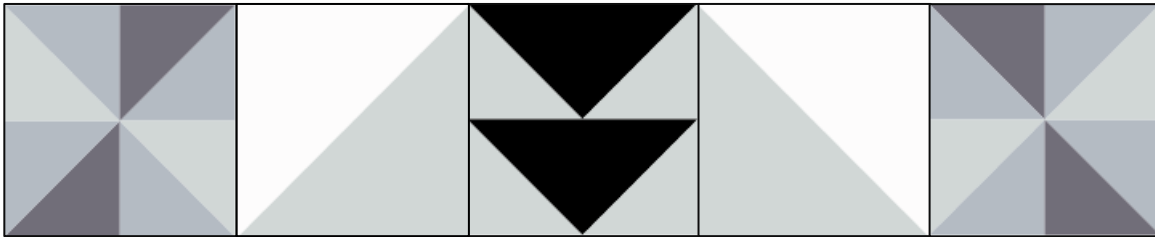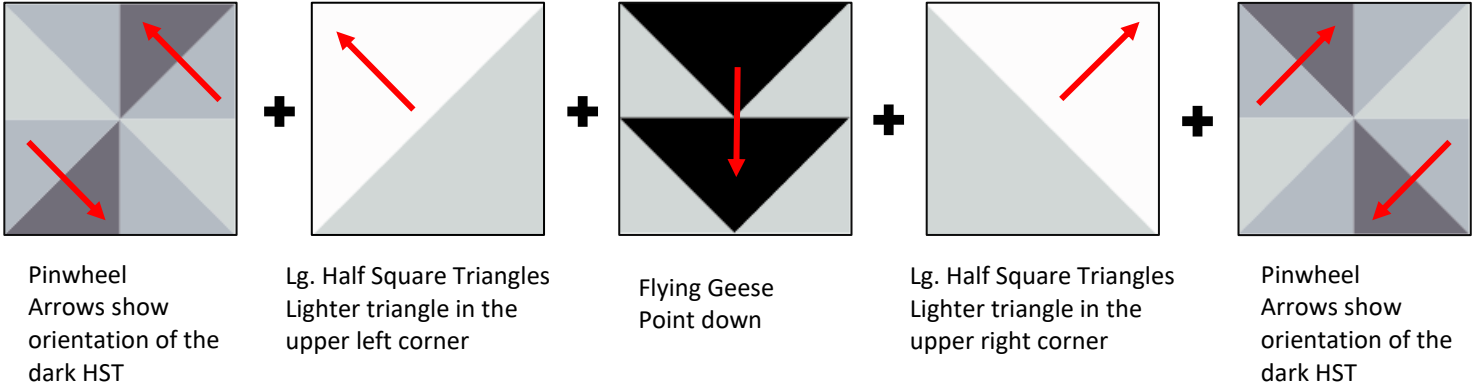



Row 3:

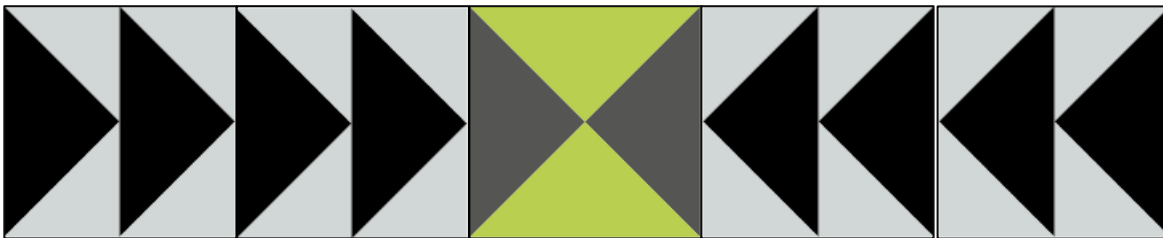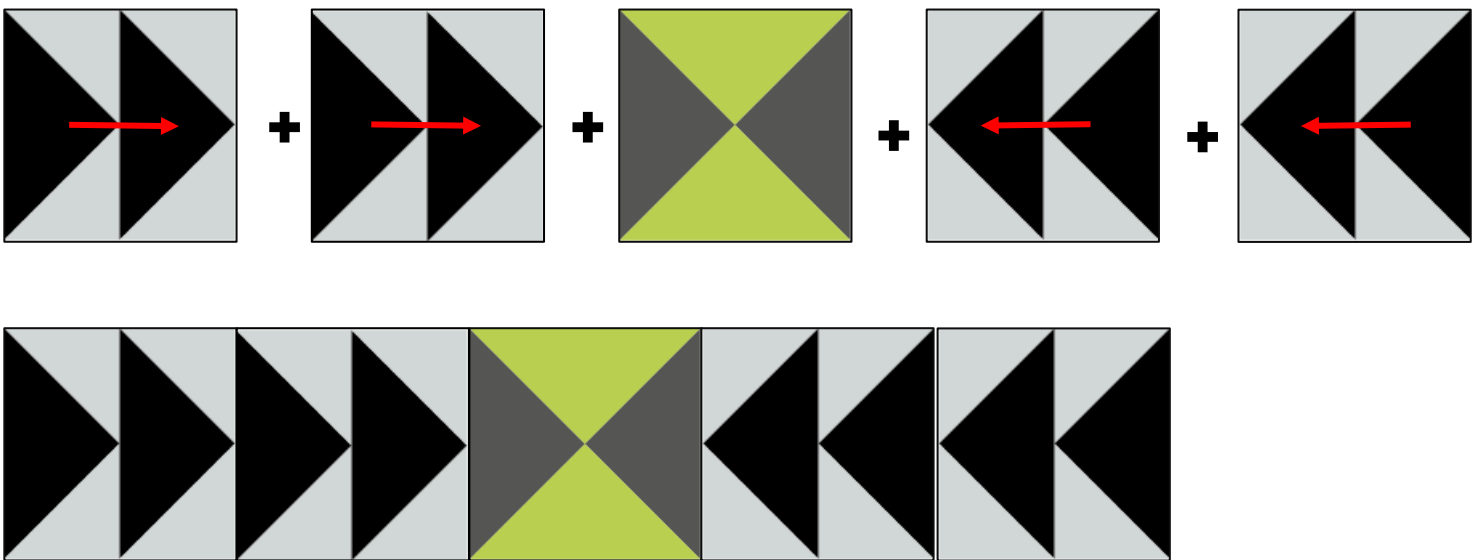


DESIGN N STITCH

with Quilters Select

Row 4:

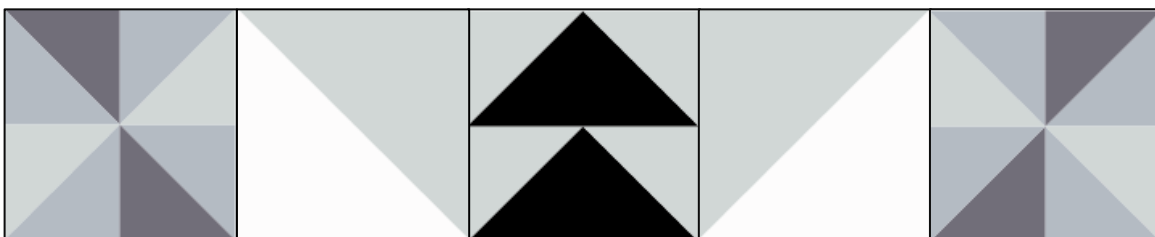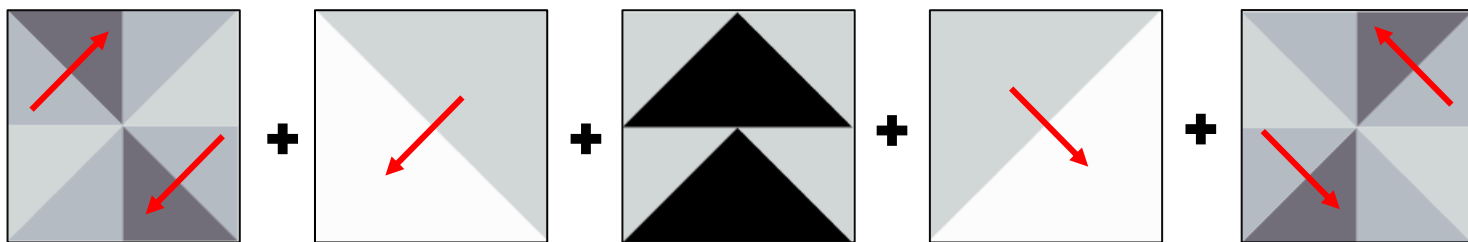

Row 5:

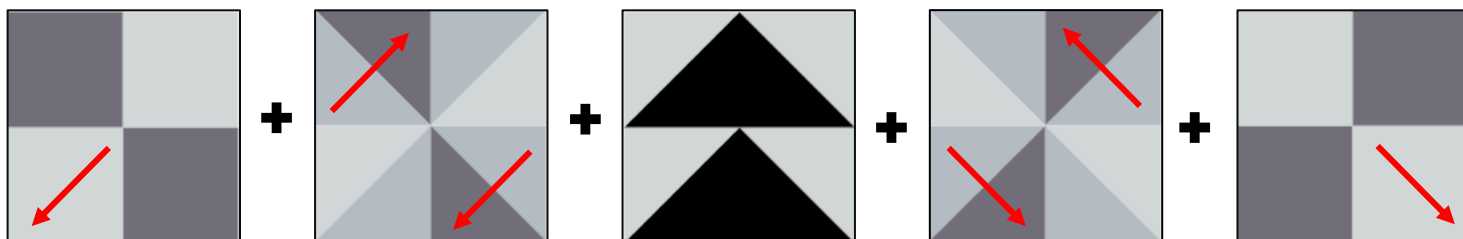

• If adding borders to the quilt:

- Cut (5) 2 1/2" x WOF strips from accent fabric
- Measure the length (vertical dimension) of the quilt in 3 places. Take the average of the measurements for the length of the two side border strips.
- Cut two strips to this length. Add the side borders
- Measure the width (horizontal dimension) in places. Take the average of the measurements
- Cut two strips this length. Add to the top and bottom.

Ta-Daaaaah! Your quilt top is Complete!